

Non-Operable Lock Component Instructions

All Ultrex Double Hung, All Ultrex Glider, All Ultrex Glider Triple Sash, All Ultrex Single Hung



TOOLS NEEDED FOR INSTALLATION

T15 Torx Driver

Phillips Driver



Figure 1: Open the lock and remove the existing screw.



Figure 2: Close the lock.

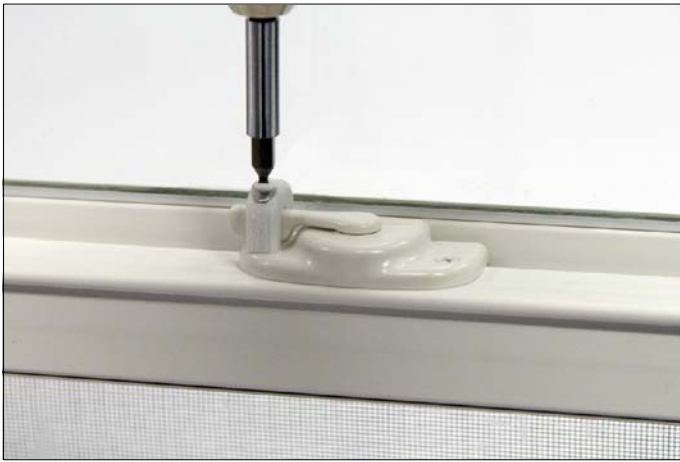


Figure 3: Install the lock limiter and tighten the screw (#6 x 1 1/4" Torx head).



Figure 4: Non-operable lock component installed. Install the warning label included with your kit on the window.

IMPORTANT SAFETY INFORMATION



WARNING: Blocks Escape in Fire and Emergency

- The Lock Limiter is not designed to be easily disengaged. The Lock Limiter cannot be readily removed in case of fire or emergency.

WARNING: No Window Rescue Above 75 ft. (6th floor)

- Do not rely on being rescued from windows above 75 ft. (6th floor). Follow building fire escape plan.

WARNING: Not a Security Device

- The Lock Limiter is not a security device. Do not rely on the Lock Limiter to secure your home.

The tamper resistant screw is not designed to be easily disengaged.

The tamper resistant screw **CANNOT BE READILY REMOVED IN CASE OF FIRE OR EMERGENCY.**

Builder / Installer: Leave a copy of this information in a conspicuous location, or in the Homeowner's Information packet, for the original owner / occupant.