CHAPTER 6

ROUND TOP by MARVIN

Unit Features 6.2
NFRC Values 6.3
Sizing Guidelines 6.7
Elevations 6.8
Round Top Assembly Examples 6.13
Grilles−Between−the−Glass 6.15
Available Divided Lite Patterns 6.17
Section Details 6.22
Section Details − Mullions 6.24
Installation Suggestions 6.25

ATTENTION:

- Specifications and technical data are subject to change without notice.
- Allow 1/16″ (1.59 mm) tolerance on all measurements.
- For answers to technical questions about Integrity products you may call our Integrity Support Line: 1−800−587−2712.
- Website: www.integritywindows.com

ROUND TOP by MARVIN

UNIT FEATURES

FRAME:
The frame exterior is made of extruded aluminum cladding. Using a two coat Kynar or Hylar finishing system, meeting or exceeding AAMA 2605–98 requirements. The interior is clear pine, kiln dried to a moisture content of 6–12% at time of fabrication. Water-repellent, preservative treated in accordance with WDMA I.S.4. Interior wood is available as Pine bare wood or factory applied white interior finish. Frame width is 4 9/16″ (116 mm). 4/4 clear pine interior stop is applied to all units. Available in stone white, pebble gray, bronze, evergreen, cashmere, or ebony colors.

JAMB EXTENSION:
6 9/16″ (167 mm) and 6 13/16″ (173mm) jamb extension available factory applied or in lineal lengths for field application.

INSTALLATION:
Folding nailing fin. Optional installation brackets available for round tops without nailing fin intended for masonry application. Some sizes require nailing fin and structural brackets.

GLAZING:
All units are manufactured with a glass thickness varying from 11/16″ (17mm) to 1” (25mm) IG with LoĒ^{2}–272®, LoĒ^{3}–366®, or LoĒ–180™ coatings including argon gas fill. Tempered glass and/or obscure glass are available as an option. All glass is of a select quality complying with ASTM C 1036. Insulating glass is manufactured and tested to pass level ASTM E 2190 and is IGCC certified. The glazing seal is a silicone bedding on both interior and exterior surfaces utilized in a sandwich style sash.

WOOD REMOVABLE INTERIOR GRILLES:
Wood grilles are manufactured from clear pine with a 3/4″ (19mm) x 15/32″ (12mm) bar, available in standard sunburst patterns with an open hub, or standard rectangular lites. Pine bare wood or factory applied white finish, to match interior.

INTERIOR / EXTERIOR SIMULATED DIVIDED LITES (SDL):
Interior bar: 7/8″ (22 mm) wide bars. Pine bare wood or factory applied white finish, to match interior. Exterior straight bar: Ultrex, 7/8″ (22 mm) wide bars. Exterior radius bar: ABS Hi, HDT 7/8″ (22 mm) wide bars, available in standard sunburst patterns with an open hub, or standard rectangular lites. Finish to match exterior. SDL with spacer bar is available on standard sunburst patterns with an open hub only. SDL with spacer bar is not available on solid or closed hub patterns.

GRILLES–BETWEEN–THE–GLASS (GBG):
GBGs are manufactured from aluminum in an 11/16″ (17 mm) contoured profile placed between two panes of glass, available in standard sunburst patterns with a solid hub. Exterior color determined by frame color. White interior.

This page intentionally left blank.
NFRC Values are now located on www.integritywindows.com.

This page left intentionally blank.
NFRC Values are now located on www.integritywindows.com.

This page left intentionally blank.
NFRC Values are now located on www.integritywindows.com.

This page left intentionally blank.
NFRC Values are now located on www.integritywindows.com.

ROUND TOP by MARVIN

SIZING GUIDELINES

Round Top multiple assemblies can be factory mulled up to 3 units wide by 2 units high.

MAXIMUM ROUGH OPENING: 113 1/2″ (2883 mm) x 91 1/16″ (2313 mm) or 85″ (2159 mm) x 107 9/16″ (2732 mm)

NOTE: Individual Double Hung Round Tops and Double Hung Round top assemblies with jamb extension: ADD 1/4″ (6 mm) to WIDTH, and 1/8″ (3 mm) HEIGHT of Frame, Rough, and Masonry Opening sizes.

6 9/16″ (167 mm) and 6 13/16” (173mm), jambs available factory installed or for field application.

Quarter Round shapes require a Casement with a continuous head jamb.

CALCULATING TOTAL ROUGH OPENING FOR ASSEMBLIES

WIDTH: ADD Frame Widths + 1″ (25 mm)

Tolerance = 1/2″ (13 mm) from frame to Rough Opening at left and right jamb.

HEIGHT: ADD Frame Heights + 1/2″ (13 mm)

Tolerance = 1/2″ (13 mm) from Frame to Rough Opening at head jamb.



1 Unit Wide 2 Units High



2 Units Wide 2 Units High



3 Units Wide 1 Unit High

MEASUREMENT CONVERSIONS				
Round Top	**WIDTH**		**HEIGHT**	
Rough Opening to	**Imperial**	**Metric**	**Imperial**	**Metric**
Masonry Opening	– 1/2″	– 13 mm	– 1/4″	– 6 mm
OM of Frame	– 1″	– 25 mm	– 1/2″	– 13 mm
Daylight Opening	– 5″	– 127 mm	– 4 1/2″	– 114 mm

ROUND TOP by MARVIN

ELEVATIONS – QUARTER ROUND, TRUE HALF CIRCLE, AND EYEBROW ABOVE SPRINGLINE

CASEMENT TRUE HALF CIRCLE

Mas. Opg.	2–8 1/2	(826)	3–0 1/2	(927)	5–4 1/2	(1638)	6–0 1/2	(1842)
Rhg. Opg.	2–9	(838)	3–1	(940)	5–5	(1651)	6–1	(1854)
Frame Size	2–8	(813)	3–0	(914)	5–4	(1626)	6–0	(1829)

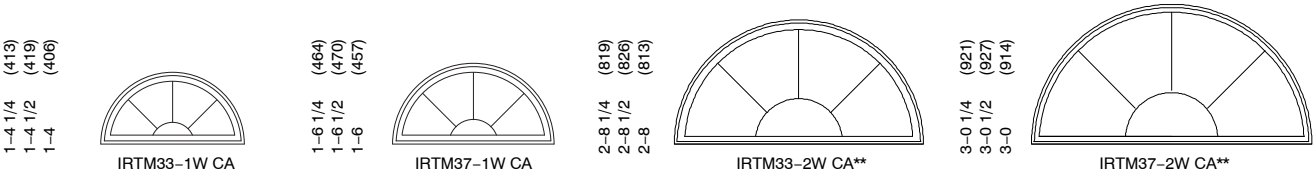

CASEMENT QUARTER ROUND

Mas. Opg.	2–0 1/2	(622)
Rhg. Opg.	2–1	(635)
Frame Size	2–0	(610)

DOUBLE HUNG CIRCLE

2–11 1/2	(902)
3–0	(914)
2–11	(889)

DOUBLE HUNG ELLIPTICAL

2–7 1/2	(800)
2–8	(813)
2–7	(787)

DOUBLE HUNG TRUE HALF CIRCLE

Mas. Opg.	3–0	(914)	3–6	(1067)	4–3 1/2	(1308)
Rhg. Opg.	3–0 1/2	(927)	3–6 1/2	(1080)	4–4	(1321)
Frame Size	2–11 1/2	(902)	3–5 1/2	(1054)	4–3	(1295)

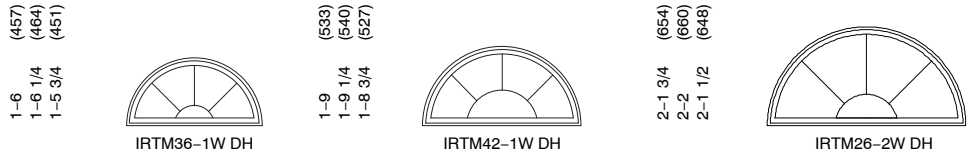

Mas. Opg.	4–11 1/2	(1511)	6–3 1/2	(1918)	6–11 1/2	(2121)
Rhg. Opg.	5–0	(1524)	6–4	(1930)	7–0	(2134)
Frame Size	4–11	(1499)	6–3	(1905)	6–11	(2108)

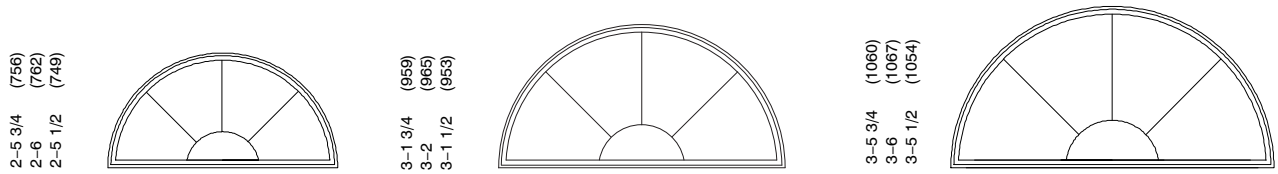

DOUBLE HUNG QUARTER ROUND

Mas. Opg.	2–6	(762)	2–10	(864)	3–0	(914)
Rhg. Opg.	2–6 1/2	(775)	2–10 1/2	(876)	3–0 1/2	(927)
Frame Size	2–5 1/2	(749)	2–9 1/2	(851)	2–11 1/2	(902)

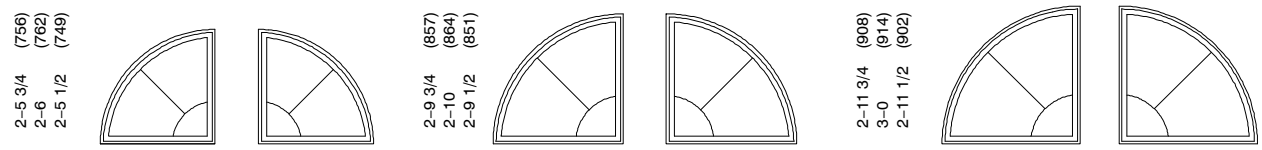

NOTE:
See Casement Chapter and Double Hung Chapter for additional information.
Imperial and metric dimensions are shown. Metric dimensions are in millimeters.
All units viewed from exterior.
* Available for use with CN50 width doors; divided lites may not align.
** 3.9 mm glass thickness.
*** 4.7 mm glass thickness.

ELEVATIONS

CASEMENT/AWNING EYEBROW ABOVE SPRINGLINE

Mas. Opg.	1–8 1/2	(521)
Rhg. Opg.	1–9	(533)
Frame Size	1–8	(508)
Rhg. Opg. Rad.	2–0 1/2	(622)

1–6 3/16 (462)
1–6 7/16 (468)
1–5 15/16 (456)

Spln. 16 ICATR

IRTM2118 CA

	2–0 1/2	(622)
	2–1	(635)
	2–0	(610)
	2–0 1/2	(622)

1–7 1/4 (489)
1–7 1/2 (495)
1–7 (483)

Spln. 16 ICATR

IRTM2519 CA

	2–0 1/2	(622)
	2–1	(635)
	2–0	(610)
	2–0 1/2	(622)

2–2 5/8 (676)
2–2 7/8 (682)
2–2 3/8 (670)

Spln. 23 IAWN

IRTM2526 CA/AWN

	2–4 1/2	(724)
	2–5	(737)
	2–4	(711)
	2–0 1/2	(622)

1–8 1/2 (521)
1–8 3/4 (527)
1–8 1/4 (514)

Spln. 16 ICATR

IRTM2920 CA

Mas. Opg.	2–4 1/2	(724)
Rhg. Opg.	2–5	(737)
Frame Size	2–4	(711)
Rhg. Opg. Rad.	2–0 1/2	(622)

2–3 7/8 (708)
2–4 1/8 (714)
2–3 5/8 (702)



Spln. 23 IAWN

IRTM2928 CA/AWN

	2–8 1/2	(826)
	2–9	(838)
	2–8	(813)
	2–6 1/2	(775)

1–8 5/8 (524)
1–8 7/8 (530)
1–8 3/8 (518)



Spln. 16 ICATR

IRTM3320 CA

	2–8 1/2	(826)
	2–9	(838)
	2–8	(813)
	2–6 1/2	(775)

2–4 (711)
2–4 1/4 (718)
2–3 3/4 (705)



Spln. 23 IAWN

IRTM3328 CA/AWN

	3–0 1/2	(927)
	3–1	(940)
	3–0	(914)
	2–6 1/2	(775)

1–10 (559)
1–10 1/4 (565)
1–9 3/4 (552)



Spln. 16 ICATR

IRTM3722 CA

Mas. Opg.	3–0 1/2	(927)
Rhg. Opg.	3–1	(940)
Frame Size	3–0	(914)
Rhg. Opg. Rad.	2–6 1/2	(775)

2–5 3/8 (746)
2–5 5/8 (752)
2–5 1/8 (740)



Spln. 23 IAWN

IRTM3729 CA/AWN

	3–4 1/2	(1029)
	3–5	(1041)
	3–4	(1016)
	3–4 1/2	(1029)

1–9 3/8 (543)
1–9 5/8 (549)
1–9 1/8 (537)



Spln. 16 ICATR

IRTM4121 CA

	3–4 1/2	(1029)
	3–5	(1041)
	3–4	(1016)
	3–4 1/2	(1029)

2–4 3/4 (730)
2–5 (737)
2–4 1/2 (724)



Spln. 23 IAWN

IRTM4128 CA/AWN

	3–4 1/2	(1029)
	3–5	(1041)
	3–4	(1016)
	3–4 1/2	(1029)

5–4 3/4 (1645)
5–5 (1651)
5–4 1/2 (1638)



Spln. 59 ICA

IRTM4164 CA**

	4–0 1/2	(1232)
	4–1	(1245)
	4–0	(1219)
	4–6 1/2	(1384)

1–9 5/8 (549)
1–9 7/8 (556)
1–9 3/8 (543)



Spln. 16 ICATR

IRTM4921 CA

	4–0 1/2	(1232)
	4–1	(1245)
	4–0	(1219)
	4–6 1/2	(1384)

2–5 (737)
2–5 1/4 (743)
2–4 3/4 (730)



Spln. 23 IAWN

IRTM4929 CA/AWN

	4–8 1/2	(1232)
	4–9	(1245)
	4–8	(1219)
	4–6 1/2	(1384)

1–11 13/16 (605)
2–0 1/19 (611)
1–11 9/16 (599)



Spln. 16 ICATR

IRTM5724 CA

	4–8 1/2	(1435)
	4–9	(1438)
	4–8	(1422)
	4–6 1/2	(1384)

2–4 3/4 (730)
2–5 (737)
2–4 1/2 (724)



Spln. 23 IAWN

IRTM5731 CA/AWN

	4–8 1/2	(1435)
	4–9	(1438)
	4–8	(1422)
	4–6 1/2	(1384)

5–4 3/4 (1645)
5–5 (1651)
5–4 1/2 (1638)



Spln. 59 ICA

IRTM5767 CA**

Mas. Opg.
Rhg. Opg.
Frame Size

NOTE:
* Indicates 3.9 mm glass thickness.
** Indicates 4.7 mm glass thickness.
*** Indicates 5.7 mm glass thickness.
Door Round Tops available for field mull only.

See Casement Chapter and Double Hung Chapter for additional information.

Imperial and metric dimensions are shown. Metric dimensions are in millimeters.

All units viewed from exterior.

ROUND TOP by MARVIN

ELEVATIONS

CASEMENT/AWNING EYEBROW ABOVE SPRINGLINE

Mas. Opg.	5–4 1/2	(1638)
Rhg. Opg.	5–5	(1651)
Frame Size	5–4	(1626)
Rhg. Opg. Rad.	6–0 1/2	(1842)

1–11 1/2 (597)
1–11 3/4 (603)
1–11 1/4 (591)



Spln. 16 ICATR

IRTM6523 CA

5–4 1/2	(1638)
5–5	(1651)
5–4	(1626)
6–0 1/2	(1842)

2–6 7/8 (784)
2–7 1/8 (791)
2–6 5/8 (778)



Spln. 23 IAWN

IRTM6531 CA/AWN

5–4 1/2	(1638)
5–5	(1651)
5–4	(1626)
6–0 1/2	(1842)

5–6 7/8 (1699)
5–7 1/8 (1705)
5–6 5/8 (1692)



Spln. 59 ICATR

IRTM6567 CA***

Mas. Opg.	6–0 1/2	(1842)
Rhg. Opg.	6–1	(1854)
Frame Size	6–0	(1829)
Rhg. Opg. Rad.	6–0 1/2	(1842)

2–1 5/8 (651)
2–1 7/8 (657)
2–1 3/8 (645)



Spln. 16 ICATR

IRTM7325 CA*

Mas. Opg.
Rhg. Opg.
Frame Size

6–0 1/2	(1842)
6–1	(1854)
6–0	(1829)
6–0 1/2	(1842)

2–9 (838)
2–9 1/4 (845)
2–8 3/4 (832)



Spln. 23 IAWN

IRTM7333 AWN*

6–0 1/2	(1842)
6–1	(1854)
6–0	(1829)
6–0 1/2	(1842)

5–9 (1753)
5–9 1/4 (1759)
5–8 3/4 (1746)



Spln. 59 ICATR

IRTM7369 CA Tempered***

NOTE:
* Indicates 3.9 mm glass thickness.
** Indicates 4.7 mm glass thickness.
*** Indicates 5.7 mm glass thickness.
Door Round Tops available for field mull only.

See Casement Chapter and Double Hung Chapter for additional information.

Imperial and metric dimensions are shown. Metric dimensions are in millimeters.

All units viewed from exterior.

ELEVATIONS

DOUBLE HUNG/DOOR EYEBROW ABOVE SPRINGLINE

Mas. Opg.	2–2	(660)		2–6	(762)		2–10	(864)		3–0	(914)
Rhg. Opg.	2–2 1/2	(673)		2–6 1/2	(775)		2–10 1/2	(876)		3–0 1/2	(927)
Frame Size	2–1 1/2	(648)		2–5 1/2	(749)		2–9 1/2	(851)		2–11 1/2	(902)
Rhg. Opg. Rad.	2–0 1/2	(622)		2–0 1/2	(622)		2–6 1/2	(775)		2–6 1/2	(775)

1–7 11/16 (500)
1–7 15/16 (506)
1–7 7/16 (494)

Spln. 16 ITDHTR

IRTM2619DH

1–9 1/8 (536)
1–9 3/8 (542)
1–8 7/8 (529)



Spln. 16 ITDHTR

IRTM3021 DH

1–9 1/8 (537)
1–9 3/8 (543)
1–8 7/8 (530)



Spln. 16 ITDHTR

IRTM3421 DH

1–9 13/16 (554)
1–10 1/16 (560)
1–9 9/16 (548)



Spln. 16 ITDHTR

IRTM3622 DH

Mas. Opg.	3–2	(965)		3–6	(1067)		4–3 1/2	(1308)			
Rhg. Opg.	3–2 1/2	(978)		3–6 1/2	(1080)		4–4	(1321)			
Frame Size	3–1 1/2	(953)		3–5 1/2	(1054)		4–3	(1295)			
Rhg. Opg. Rad.	3–4 1/2	(1029)		3–4 1/2	(1029)		4–6 1/2	(1384)			

1–8 5/8 (525)
1–8 7/8 (531)
1–8 3/8 (518)



Spln. 16 ITDHTR

IRTM3820DH

1–9 13/16 (554)
1–10 1/16 (560)
1–9 9/16 (548)



Spln. 16 ITDHTR

IRTM4222 DH

1–10 3/8 (569)
1–10 5/8 (575)
1–10 1/8 (563)



Spln. 16 ITDHTR

IRTM5222 DH

Mas. Opg.	4–3 1/2	(1308)		4–11 1/2	(1511)		4–11 1/2	(1511)			
Rhg. Opg.	4–4	(1321)		5–0	(1524)		5–0	(1524)			
Frame Size	4–3	(1295)		4–11	(1499)		4–11	(1499)			
Rhg. Opg. Rad.	4–6 1/2	(1384)		4–6 1/2	(1384)		4–6 1/2	(1384)			

5–6 3/8 (1687)
5–6 5/8 (1693)
5–6 1/8 (1680)



Spln. 60 ITDH

IRTM5266DH***

2–0 3/4 (629)
2–1 (636)
2–0 1/2 (623)



Spln. 16 ITDHTR

IRTM6025 DH/DR

2–8 5/32 (817)
2–8 13/32 (823)
2–7 29/32 (810)



Spln. 23 1/8 ITDHTR

IRTM6032 DH/DR

Mas. Opg.	4–11 1/2	(1511)		5–7 1/2	(1715)
Rhg. Opg.	5–0	(1524)		5–8	(1727)
Frame Size	4–11	(1499)		5–7	(1702)
Rhg. Opg. Rad.	4–6 1/2	(1384)		6–0 1/2	(1842)

5–8 3/4 (1747)
5–9 (1753)
5–8 1/2 (1741)



Spln. 60 ITDH

IRTM6069 DH/DR**

2–0 1/4 (617)
2–0 1/2 (623)
2–0 (610)



Spln. 16 ITDHTR

IRTM6824DH

Mas. Opg.
Rhg. Opg.
Frame Size

NOTE:
* Indicates 3.9 mm glass thickness.
** Indicates 4.7 mm glass thickness.
*** Indicates 5.7 mm glass thickness.
Door Round Tops available for field mull only.

See Casement Chapter and Double Hung Chapter for additional information.

Imperial and metric dimensions are shown. Metric dimensions are in millimeters.

All units viewed from exterior.

ELEVATIONS

DOUBLE HUNG/DOOR EYEBROW ABOVE SPRINGLINE

Mas. Opg.	5–7 1/2	(1715)
Rhg. Opg.	5–8	(1727)
Frame Size	5–7	(1702)
Rhg. Opg. Rad.	6–0 1/2	(1842)

5–8 1/4 (1734)
5–8 1/2 (1741)
5–8 (1728)



Spln. 60 ITDH

IRTM6868 DH**

5–11 1/2	(1816)
6–0	(1829)
5–11	(1803)
6–0 1/2	(1842)

2–1 3/8 (645)
2–1 5/8 (651)
2–1 1/8 (638)



Spln. 16 ITDHTR

IRTM7225 DH/DR*

5–11 1/2	(1816)
6–0	(1829)
5–11	(1803)
6–0 1/2	(1842)

5–8 3/4 (1746)
5–9 (1753)
5–8 1/2 (1740)



IRTM7269 DH/DR Tempered***

6–3 1/2	(1918)
6–4	(1930)
6–3	(1905)
6–0 1/2	(1842)

2–2 1/2 (674)
2–2 3/4 (680)
2–2 1/4 (668)



Spln. 16 ITDHTR

IRTM7626 DH*

6–3 1/2	(1918)
6–4	(1930)
6–3	(1905)
6–0 1/2	(1842)

5–10 1/2 (1791)
5–10 3/4 (1798)
5–10 1/4 (1785)



Spln. 60 ITDH

IRTM7670 DH Tempered***

6–11 1/2	(2121)
7–0	(2134)
6–11	(2108)
6–0 1/2	(1842)

2–5 1/8 (741)
2–5 3/8 (747)
2–4 7/8 (734)



Spln. 16 ITDHTR

IRTM8429 DH**

6–11 1/2	(2121)
7–0	(2134)
6–11	(2108)
6–0 1/2	(1842)

6–1 1/8 (1858)
6–1 3/8 (1865)
6–0 7/8 (1852)



Spln. 60 ITDH

IRTM8473 DH Tempered***

NOTE:
* Indicates 3.9 mm glass thickness.
** Indicates 4.7 mm glass thickness.
*** Indicates 5.7 mm glass thickness.
Door Round Tops available for field mull only.

See Casement Chapter and Double Hung Chapter for additional information.

Imperial and metric dimensions are shown. Metric dimensions are in millimeters.

All units viewed from exterior.

ROUND TOP by MARVIN

Integrity from MARVIN Windows and Doors

ELEVATIONS

CASEMENT TRUE HALF ABOVE SPRINGLINE

Mas. Opg.	3–0 1/2	(927)
Rgh. Opg.	3–1	(940)
Frame Size	3–0	(914)
Rgh. Opg. Rad.	1–6 1/2	(470)

Mas. Opg. 5–5 3/8 (1661)
Rgh. Opg. 5–5 5/8 (1667)
Frame Size 5–5 1/8 (1654)



IRTM3765 CA*

	3–0 1/2	(927)
	3–1	(940)
	3–0	(914)
	1–6 1/2	(470)

Mas. Opg. 6–5 3/8 (1965)
Rgh. Opg. 6–5 5/8 (1972)
Frame Size 6–5 1/8 (1959)



IRTM3777 CA*

	4–0 1/2	(1232)
	4–1	(1245)
	4–0	(1219)
	2–0 1/2	(622)

Mas. Opg. 5–11 3/8 (1813)
Rgh. Opg. 5–11 5/8 (1819)
Frame Size 5–11 1/8 (1807)



IRTM4971 CA*

	4–0 1/2	(1232)
	4–1	(1245)
	4–0	(1219)
	2–0 1/2	(622)

Mas. Opg. 6–11 3/8 (2118)
Rgh. Opg. 6–11 5/8 (2124)
Frame Size 6–11 1/8 (2111)



IRTM4983 CA**

	6–0 1/2	(1842)
	6–1	(1854)
	6–0	(1829)
	3–0 1/2	(927)

Mas. Opg. 4–11 3/8 (1508)
Rgh. Opg. 4–11 5/8 (1514)
Frame Size 4–11 1/8 (1502)



IRTM7359 CA**

DOUBLE HUNG TRUE HALF ABOVE SPRINGLINE

Mas. Opg.	5–7 1/2	(1715)
Rgh. Opg.	5–8	(1727)
Frame Size	5–7	(1702)
Rgh. Opg. Rad.	2–10	(864)

Mas. Opg. 5–9 1/2 (1765)
Rgh. Opg. 5–9 3/4 (1772)
Frame Size 5–9 1/4 (1759)



IRTM6869 DH**

DOOR TRUE HALF ABOVE SPRINGLINE

	5–11 1/2	(1816)
	6–0	(1829)
	5–11	(1803)
	3–0	(914)

Mas. Opg. 4–11 1/8 (1502)
Rgh. Opg. 4–11 3/8 (1508)
Frame Size 4–10 7/8 (1495)



IRTM7259 DR**

MULTIPLE ASSEMBLIES

Assemblies below represent factory mulled round tops to Casement or Double Hung units. Patio Door Round tops are available for field mull only.
Assemblies available using various standard heights for individual units below Round Top. See individual chapters for additional information.
Standard grille patterns within Round Top units differ between 3/4″ removable grille and grilles between glass, see below for examples.

Mas. Opg.	2–8 1/2	(826)
Rgh. Opg.	2–9	(838)
Frame Size	2–8	(813)

Mas. Opg. 5–3 3/8 (1610)
Rgh. Opg. 5–3 5/8 (1616)
Frame Size 5–3 1/8 (1603)



IRTM33–1W CA
ICA3347

	3–0 1/2	(927)
	3–1	(940)
	3–0	(914)

Mas. Opg. 3–5 3/8 (1051)
Rgh. Opg. 3–5 5/8 (1057)
Frame Size 3–5 1/8 (1045)



IRTM37–1W CA
IAWN3723

	3–0 1/2	(927)
	3–1	(940)
	3–0	(914)

Mas. Opg. 4–9 3/8 (1464)
Rgh. Opg. 4–9 5/8 (1457)
Frame Size 4–9 1/8 (1451)



IRTM37–1W CA
IAWN3739

	2–0 1/2	(622)
	2–1	(635)
	2–0	(610)

Mas. Opg. 5–11 3/8 (1813)
Rgh. Opg. 5–11 5/8 (1819)
Frame Size 5–11 1/8 (1807)



IQCIRM–25–1W CA
ICA2547

Mas. Opg.	3–0	(915)
Rgh. Opg.	3–0 1/2	(927)
Frame Size	2–11 1/2	(902)

Mas. Opg. 4–9 3/4 (1467)
Rgh. Opg. 4–10 (1473)
Frame Size 4–9 1/2 (1461)



IRTM36–1W DH
ITDH3640

	3–6	(1067)
	3–6 1/2	(1080)
	3–5 1/2	(1054)

Mas. Opg. 5–8 3/4 (1746)
Rgh. Opg. 5–9 (1753)
Frame Size 5–8 1/2 (1740)



IRTM42–1W DH
ITDH4248

	6–3 1/2	(1918)
	6–4	(1930)
	6–3	(1905)

Mas. Opg. 6–5 1/2 (1969)
Rgh. Opg. 6–5 3/4 (1975)
Frame Size 6–5 1/4 (1962)



IRTM38–2W DH
ITDH3840–2W

NOTE:
* Indicates 4 mm glass thickness.
** Indicates 4.7 mm glass thickness

Door Round Tops available for field mull only.

See Casement Chapter and Double Hung Chapter for additional information.

Imperial and metric dimensions are shown. Metric dimensions are in millimeters.

All units viewed from exterior.

ROUND TOP by MARVIN

ELEVATIONS – ROUND TOP OVER CASEMENT/DOUBLE HUNG

Assemblies below represent factory mulled round tops to Casement or Double Hung units. Patio Door Round tops are available for field mull only.
Assemblies available using various standard heights for individual units below Round Top. See individual chapters for additional information.
Standard grille patterns within Round Top units differ between 3/4″ removable grille, SDL, and grilles between glass, see below for examples.

Mas. Opg.	4–0 1/2	(1232)
Rgh. Opg.	4–1	(1245)
Frame Size	4–0	(1219)

4–4 1/8 (1324)
4–4 3/8 (1330)
4–3 7/8 (1318)



IRTM4929 CA
ICA2523–2W

4–0 1/2	(1232)
4–1	(1245)
4–0	(1219)

6–4 3/4 (1949)
6–5 (1956)
6–4 1/2 (1943)



IRTM4921 CA
ICA2555–2W

4–8 1/2	(1435)
4–9	(1448)
4–8	(1422)

4–6 5/16 (1354)
4–6 9/16 (1386)
4–6 1/16 (1373)



IRTM5731 CA
ICA2923–2W

4–8 1/2	(1435)
4–9	(1448)
4–8	(1422)

6–6 15/16 (2005)
6–7 3/16 (2011)
6–6 11/16 (1999)



IRTM5724 CA
ICA2955–2W

5–7 1/2	(1715)
5–8	(1727)
5–7	(1702)

6–8 (2032)
6–8 1/4 (2038)
6–7 3/4 (2026)



IRTM6824 DH
ITDH3456–2W

Mas. Opg.	6–0 1/2	(1842)
Rgh. Opg.	6–1	(1854)
Frame Size	6–0	(1829)

4–8 1/8 (1425)
4–8 3/8 (1432)
4–7 7/8 (1419)



IRTM7333 CA
ICA2523–3W

6–0 1/2	(1842)
6–1	(1854)
6–0	(1829)

6–8 3/4 (2051)
6–9 (2057)
6–8 1/2 (2045)



IRTM7325 CA
ICA2555–3W

8–0 1/2	(2451)
8–1	(2464)
8–0	(2438)

5–5 (1651)
5–5 1/4 (1657)
5–4 3/4 (1645)



IRTM4965 CA
ICA2559

9–4 1/2	(2858)
9–5	(2870)
9–4	(2845)

5–7 3/16 (1707)
5–7 7/16 (1713)
5–6 15/16 (1700)



IRTM5767 CA
ICA2959

Mas. Opg.	9–4 1/2	(2858)
Rgh. Opg.	9–5	(2870)
Frame Size	9–4	(2845)

5–9 (1753)
5–9 1/4 (1759)
5–8 3/4 (1747)



IRTM7369 CA – TEMPERED ONLY
ICA2159

9–2 1/2	(2807)
9–3	(2819)
9–2	(2794)

5–8 1/4 (1734)
5–8 1/2 (1740)
5–8 (1727)



IRTM6868 DH
ITDH2260

Mas. Opg.	8–4 1/2	(2553)
Rgh. Opg.	8–5	(2565)
Frame Size	8–4	(2540)

5–5 3/8 (1661)
5–5 5/8 (1667)
5–5 1/8 (1654)



IRTM3765 CA/ICA3347

8–0 1/2	(2451)
8–1	(2464)
8–0	(2438)

5–11 3/8 (1813)
5–11 5/8 (1819)
5–11 1/8 (1807)



IRTM4971 CA/ICA2547

7–4 1/2	(2248)
7–5	(2261)
7–4	(2235)

6–11 3/8 (2118)
6–11 5/8 (2124)
6–11 1/8 (2111)



IRTM4983 CA/ICA2159

7–8 1/2	(2350)
7–9	(2362)
7–8	(2337)

6–5 3/8 (1965)
6–5 5/8 (1972)
6–5 1/8 (1959)



IRTM3777 CA/ICA2959

Mas. Opg.	9–2 1/2	(2807)
Rgh. Opg.	9–3	(2819)
Frame Size	9–2	(2794)

5–9 1/2 (1765)
5–9 3/4 (1772)
5–9 1/4 (1759)



IRTM6869 DH/ITDH2236

6–0 1/2	(1842)
6–1	(1854)
6–0	(1829)

6–10 1/2 (2096)
6–10 3/4 (2102)
6–10 1/4 (2089)



IRTM7359 CA/AWN
IAWN2523–3W

Mas. Opg.
Rgh. Opg.
Frame Size

LITE PATTERNS

SDL AND INTERIOR REMOVABLE GRILLE

GBG



Not Available

Contact your sales representative for multiple assembly lite alignment.
Certain assemblies do not allow for exact lite alignment.

ROUND TOP by MARVIN

GRILLES–BETWEEN–THE–GLASS

CASEMENT


QCIRM 25–1W

IRTM 33–1W CA

IRTM 37–1W CA

DOUBLE HUNG

IRTM 36–1W DH


IRTM 42–1W DH


IRTM 38–2W DH

EYEBROW ABOVE SPRINGLINE


IRTM 4921CA


IRTM 4929 CA/AWN


IRTM 4965 CA


IRTM 5724 CA


IRTM 5731 CA/AWN


IRTM 5767 CA


IRTM 6824 DH


IRTM 6868 DH


IRTM 7325 CA


IRTM 7333 CA/AWN


IRTM 7369 CA


IRTM 7225 DR


IRTM 7233 DR


IRTM 7269 DR

NOTE: GBGs are not available on True Half above Springline units

NOTE: GBGs may not line up in multiple assemblies. For more information, contact your Integrity representative.

MULTIPLE ASSEMBLIES WITH GRILLES/SDLS/GBGS LINING UP (examples)



IRTM 36−1W / ITDH 3640



IRTM 4921 / ICA 2555 2W

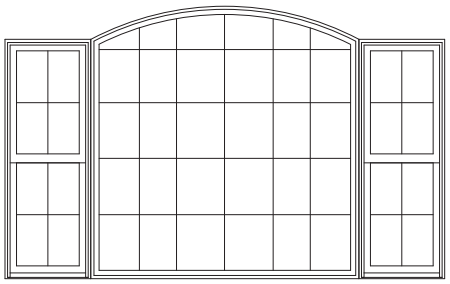

IDH 2260 / IRTM 6868 / ITDH 2260



IRTM 7333 / IAWN 2523 3W

MULTIPLE ASSEMBLIES WITH GRILLES/SDLS/GBGS NOT LINING UP (examples)



IRTM 4921 / ICAP 4939



IRTM 5724 / ICAP 5739



IRTM 7333 / IAWN 3723 2W

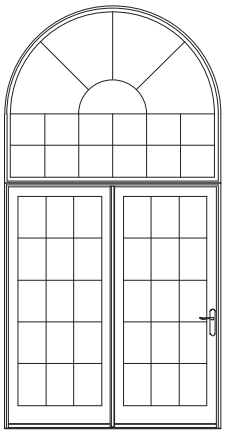

IRTM 7259 / IIFD 6068
(available field mulled only)



IRTM 36 −1W / ICA 1735 2W

NOTE: GBGs are not available on True Half above Springline units

NOTE: GBGs may not line up in multiple assemblies. For more information, contact your Integrity representative.

AVAILABLE DIVIDED LITE PATTERNS

Notes:

- IRTM DH/DR: When ordering 6 9/16″ or 6 13/16″ jamb extensions, add 1/4″ to width and 1/8″ to height of Frame Size(FS), Rough Opening (RO), and Masonry Opening (MO).
- GBGs are not available with the ICA or ITDH Tempered Obscure glass option.
- GBG interior bars are available White only. The GBG exterior finish will be determined by the unit exterior finish.
- SDL interior bars are available bare or with White Interior Finish. The SDL exterior finish will be determined by the unit exterior finish.
- White interior Finish on Grilles, SDL, Jamb Extensions, and Interior Trim is available at no additional charge.
- For additional window or door options, refer to the Divided Lite Options page in the appropriate product sections.
- SDL with spacer bar available on standard sunburst patterns with an open hub only. SDL with spacer bar is not available on solid or closed hub patterns.

AVAILABLE DIVIDED LITE PATTERNS



Open Hub, 3 Spokes
Sunburst Lite Cut
Wood Grilles, GBGs, SDL



Open Hub,1 Spoke
Sunburst Lite Cut
Wood Grilles, SDL



Open Hub, 2 Spokes
Sunburst Lite Cut
GBGs



Solid Hub, 3 Spokes
Sunburst Lite Cut
GBGs



Solid Hub, 2 Spokes
Sunburst Lite Cut
GBGs



Rectangular Lite Cut 2W2H
Wood Grilles,GBGs, SDL



Rectangular Lite Cut Wood
Grilles, GBGs, SDL

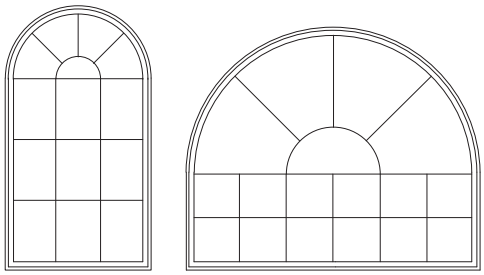

Open Hub, 3 Spokes Sunburst Lite Cut
Wood Grilles, SDL

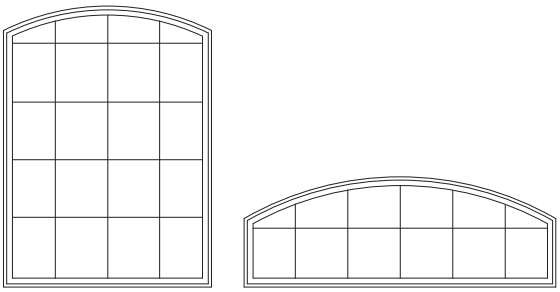

Rectangular Lite Cut
Wood Grilles, GBGs,SDL

DIVIDED LITE OPTIONS



Wood Removable Grille



Aluminum Grille Between Glass



Simulated Divided Lite



Simulated Divided Lite
with Spacer Bar

AVAILABLE DIVIDED LITE PATTERNS

CN	Wood Grille	Unit Alignment	GBG		Unit Alignment	SDL	Unit Alignment
ROUND TOP per unit – Sunburst Lite Cut							
IQCIRM 25–1W CA	Sunburst Open Hub 1 Spoke	ICA/IAWN 25–1W	Sunburst Solid Hub 2 Spokes	Sunburst Open Hub 2 Spokes	ICA/IAWN 25–1W	Sunburst Open Hub 1 Spoke	ICA/IAWN 25–1W
IRTM 33–1W CA	Sunburst Open Hub 3 Spokes	ICA/IAWN 33–1W	Sunburst Solid Hub 3 Spokes	Sunburst Open Hub 3 Spokes	ICA/IAWN 33–1W	Sunburst Open Hub 3 Spokes	ICA/IAWN 33–1W
IRTM 33–2W CA	Sunburst Open Hub 3 Spokes	ICA/IAWN 33–2W	Sunburst Solid Hub 3 Spokes	Sunburst Open Hub 3 Spokes	ICA/IAWN 33–2W	Sunburst Open Hub 3 Spokes	ICA/IAWN 33–2W
IRTM 37–1W CA	Sunburst Open Hub 3 Spokes	ICA/IAWN 37–1W	Sunburst Solid Hub 3 Spokes	Sunburst Open Hub 3 Spokes	ICA/IAWN 37–1W	Sunburst Open Hub 3 Spokes	ICA/IAWN 37–1W
IRTM 37–2W CA	Sunburst Open Hub 3 Spokes	ICA/IAWN 37–2W	Sunburst Solid Hub 3 Spokes	Sunburst Open Hub 3 Spokes	ICA/IAWN 37–2W	Sunburst Open Hub 3 Spokes	ICA/IAWN 37–2W
IRTM 26–2W DH	Sunburst Open Hub 3 Spokes	ITDH 26–2W	Sunburst Solid Hub 3 Spokes	Sunburst Open Hub 3 Spokes	ITDH 26–2W	Sunburst Open Hub 3 Spokes	ITDH 26–2W
IQCIRM 30–1W DH	Sunburst Open Hub 1 Spoke	ITDH 30–1W	Sunburst Solid Hub 2 Spokes	Sunburst Open Hub 2 Spokes	ITDH 30–1W	Sunburst Open Hub 1 Spoke	ITDH 30–1W
IRTM 30–2W DH	Sunburst Open Hub 3 Spokes	ITDH 30–2W	Sunburst Solid Hub 3 Spokes	Sunburst Open Hub 3 Spokes	ITDH 30–2W	Sunburst Open Hub 3 Spokes	ITDH 30–2W
IQCIRM 34–1W DH	Sunburst Open Hub 1 Spoke	ITDH 34–1W	Sunburst Solid Hub 2 Spokes	Sunburst Open Hub 2 Spokes	ITDH 34–1W	Sunburst Open Hub 1 Spoke	ITDH 34–1W
IQCIRM 36–1W DH	Sunburst Open Hub 1 Spoke	ITDH 36–1W	Sunburst Solid Hub 2 Spokes	Sunburst Open Hub 2 Spokes	ITDH 36–1W	Sunburst Open Hub 1 Spoke	ITDH 36–1W
IRTM 36–1W DH	Sunburst Open Hub 3 Spokes	ITDH 36–1W	Sunburst Solid Hub 3 Spokes	Sunburst Open Hub 3 Spokes	ITDH 36–1W	Sunburst Open Hub 3 Spokes	ITDH 36–1W
IRTM 38–2W DH	Sunburst Open Hub 3 Spokes	ITDH 38–2W	Sunburst Solid Hub 3 Spokes	Sunburst Open Hub 3 Spokes	ITDH 38–2W	Sunburst Open Hub 3 Spokes	ITDH 38–2W
IRTM 42–1W DH	Sunburst Open Hub 3 Spokes	ITDH 42–1W	Sunburst Solid Hub 3 Spokes	Sunburst Open Hub 3 Spokes	ITDH 42–1W	Sunburst Open Hub 3 Spokes	ITDH 42–1W
IRTM 42–2W DH	Sunburst Open Hub 3 Spokes	ITDH 42–2W	Sunburst Solid Hub 3 Spokes	Sunburst Open Hub 3 Spokes	ITDH 42–2W	Sunburst Open Hub 3 Spokes	ITDH 42–2W

AVAILABLE DIVIDED LITE PATTERNS

CN	Wood Grille	Unit Alignment	GBG	Unit Alignment	SDL	Unit Alignment
TRUE HALF ABOVE SPRINGLINE per unit – Sunburst over Rectangular Lite Cut						
IRTM 3765 CA	Open Hub 3 Spokes over 3W3H	ICA 47H	n/a	n/a	Open Hub 3 Spokes over 3W3H	ICA 47H
IRTM 3777 CA	Open Hub 3 Spokes over 3W4H	ICA 59H	n/a	n/a	Open Hub 3 Spokes over 3W4H	ICA 59H
IRTM 4971 CA	Open Hub 3 Spokes over 4W3H	ICA 47H	n/a	n/a	Open Hub 3 Spokes over 4W3H	ICA 47H
IRTM 4983 CA	Open Hub 3 Spokes over 4W4H	ICA 59H	n/a	n/a	Open Hub 3 Spokes over 4W4H	ICA 59H
IRTM 6869 DH/DR	Open Hub 3 Spokes over 6W4H	ITDH 36H	n/a	n/a	Open Hub 3 Spokes over 6W4H	ITDH 36H ITDH 36–2W
IRTM 7359 CA/AWN	Open Hub 3 Spokes over 6W2H	IAWN 23H ICA/IAWN 25–3W	n/a	n/a	Open Hub 3 Spokes over 6W2H	IAWN 23H ICA/IAWN 25–3W
IRTM 7259 DH/DR	Open Hub 3 Spokes over 6W2H	ITDH 36–2W	n/a	n/a	Open Hub 3 Spokes over 6W2H	ITDH 36–2W

AVAILABLE DIVIDED LITE PATTERNS

CN	Wood Grille	Unit Alignment	GBG	Unit Alignment	SDL	Unit Alignment
EYEBROW ABOVE SPRINGLINE – Rectangular Cut						
IRTM 2118 CA	2W2H	ICATR 16H ICA 21–1W	2W2H	ICATR 16H ICA 21–1W	2W2H	ICATR 16H ICA 21–1W
IRTM 2519 CA	2W2H	ICATR 16H ICA 25–1W	2W2H	ICATR 16H ICA/IAWN 25–1W	2W2H	ICATR 16H ICA/AWN 25–1W
IRTM 2526 CA/AWN	2W3H	IAWN 23H ICA/IAWN 25–1W	2W3H	IAWN 23H ICA/IAWN 25–1W	2W3H	ICAWN 23H ICA/IAWN 25–1W
IRTM 2920 CA	3W2H	ICATR 16H ICA/IAWN 29–1W	3W2H	ICATR 16H ICA/IAWN 29–1W	3W2H	ICATR 16H ICA/IAWN 29–1W
IRTM 2928 CA/AWN	3W3H	IAWN 23H ICA/IAWN 29–1W	3W3H	IAWN 23H ICA/IAWN 29–1W	3W3H	ICAWN 23H ICA/IAWN 29–1W
IRTM 3320 CA	3W2H	ICATR 16H ICA/IAWN 33–1W	3W2H	ICATR 16H ICA/IAWN 33–1W	3W2H	ICATR 16H ICA/IAWN 33–1W
IRTM 3328 CA/AWN	3W3H	IAWN 23H ICA/IAWN 33–1W	3W3H	IAWN 23H ICA/IAWN 33–1W	3W3H	IAWN 23H ICA/vAWN 33–1W
IRTM 3722 CA	3W2H	ICATR 16H ICA/ICAP/IAWN 37–1W	3W2H	ICATR 16H ICA/ICAP/IAWN 37–1W	3W2H	ICATR 16H ICA/ICAP/IAWN 37–1W
IRTM 3729 CA/AWN	3W3H	IAWN 23H ICA/ICAP/IAWN 37–1W	3W3H	IAWN 23H ICA/ICAP/IAWN 37–1W	3W3H	ICAWN 23H ICA/ICAP/IAWN 37–1W
IRTM 4121 CA	4W2H	ICATR 16H ICA 21–2W	4W2H	ICATR 16H ICA 21–2W	4W2H	ICATR 16H ICA 21–2W
IRTM 4128 CA/AWN	4W3H	IAWN 23H ICA 21–2W	4W3H	IAWN 23H ICA 21–2W	4W3H	ICAWN 23H ICA 21–2W
IRTM 4164 CA	4W5H	ICA 59H ICA 21–2W	4W5H	ICA 59H ICA 21–2W	4W5H	ICA 59H ICA 21–2W
IRTM 4921 CA	4W2H	ICATR 16H ICA/IAWN 25–2W	4W2H	ICATR 16H ICA/IAWN 25–2W	4W2H	ICATR 16H ICA/IAWN 25–2W
IRTM 4929 CA/AWN	4W3H	IAWN 23H ICA/IAWN 25–2W	4W3H	IAWN 23H ICA/IAWN 25–2W	4W3H	IAWN 23H ICA/IAWN 25–2W
IRTM 4965 CA	4W5H	ICA 59H ICA/IAWN 25–2W	4W5H	ICA 59H ICA/IAWN 25–2W	4W5H	ICA 59H ICA/IAWN 25–2W
IRTM 5724 CA	6W2H	ICATR 16H ICA/IAWN 29–2W	6W2H	ICATR 16H ICA/IAWN 29–2W	6W2H	ICATR 16H ICA/IAWN 29–2W
IRTM 5731 CA/AWN	6W3H	IAWN 23H ICA/IAWN 29–2W	6W3H	IAWN 23H ICA/IAWN 29–2W	6W3H	IAWN 23H ICA/IAWN 29–2W
IRTM 5767 CA	6W5H	ICA 59H ICA/IAWN 29–2W	6W5H	ICA 59H ICA/IAWN 29–2W	6W5H	ICA 59H ICA/AWN 29–2W
IRTM 6523 CA	6W2H	ICATR 16H ICA/IAWN 33–2W	6W2H	ICATR 16H ICA/IAWN 33–2W	6W2H	ICATR 16H ICA/IAWN 33–2W
IRTM 6531 CA/AWN	6W3H	IAWN 23H ICA/IAWN 33–2W	6W3H	IAWN 23H ICA/IAWN 33–2W	6W3H	IAWN 23H ICA/IAWN 33–2W
IRTM 6567 CA	6W5H	ICA 59H ICA/IAWN 33–2W	6W5H	ICA 59H ICA/IAWN 33–2W	6W5H	ICA 59H ICA/IAWN 33–2W
IRTM 7325 CA	6W2H	ICATR 16H ICA/IAWN 25–3W	6W2H	ICATR 16H ICA/IAWN 25–3W	6W2H	ICATR 16H ICA/IAWN 25–3W
IRTM 7333 CA/AWN	6W3H	IAWN 23H ICA/IAWN 25–3W	6W3H	IAWN 23H ICA/IAWN 25–3W	6W3H	IAWN 23H ICA/IAWN 25–3W
IRTM 7369 CA	6W5H	ICA 59H ICA/IAWN 25–3W	6W5H	ICA 59H ICA/IAWN 25–3W	6W5H	ICA 59H ICA/IAWN 25–3W

Notes:

- Direct Glaze Round Tops with Wood Grilles, GBGs, or SDL will only align with the lite cut of the unit it is intended to be mulled with.

AVAILABLE DIVIDED LITE PATTERNS

CN	Wood Grille	Unit Alignment	GBG	Unit Line Up	SDL	Unit Alignment
EYEBROW ABOVE SPRINGLINE – Rectangular Cut						
IRTM 2619 DH	3W2H	ITDHTR 16H ITDH 26–1W	3W2H	ITDHTR 16H ITDH 26–1W	3W2H	ITDHTR 16H ITDH 26–1W
IRTM 3021 DH	3W2H	ITDHTR 16H ITDH 30–1W	3W2H	ITDHTR 16H ITDH 30–1W	3W2H	ITDHTR 16H ITDH 30–1W
IRTM 3421 DH	3W2H	ITDHTR 16H ITDH 34–1W	3W2H	ITDHTR 16H ITDH 34–1W	3W2H	ITDHTR 16H ITDH 34–1W
IRTM 3622 DH	3W2H	ITDHTR 16H ITDH 36–1W	3W2H	ITDHTR 16H ITDH 36–1W	3W2H	ITDHTR 16H ITDH 36–1W
IRTM 3820 DH	4W2H	ITDHTR 16H ITDH/ITDHP 38–1W	4W2H	ITDHTR 16H ITDH/ITDHP 38–1W	4W2H	ITDHTR 16H ITDH/ITDHP 38–1W
IRTM 4222 DH	4W2H	ITDHTR 16H ITDH/ITDHP 42–1W	4W2H	ITDHTR 16H ITDH/ITDHP 42–1W	4W2H	ITDHTR 16H ITDH/ITDHP 42–1W
IRTM 5222 DH	6W2H	ITDHTR 16H ITDH 26–2W	6W2H	ITDHTR 16H ITDH 26–2W	6W2H	ITDHTR 16H ITDH 26–2W
IRTM 5266 DH	6W5H	ITDH 60H ITDH 26–2W	6W5H	ITDH 60H ITDH 26–2W	6W5H	ITDH 60H ITDH 26–2W
IRTM 6025 DH/DR	6W2H	ITDHTR 16H ITDH 30–2W	6W2H	ITDHTR 16H ITDH 30–2W	6W2H	ITDHTR 16H ITDH 30–2W
IRTM 6032 DH	6W3H	ITDHTR 23H ITDH 30–2W	6W3H	ITDHTR 23H ITDH 30–2W	6W3H	ITDHTR 23H ITDH 30–2W
IRTM 6069 DH/DR	6W5H	ITDH 60H ITDH 30–2W	6W5H	ITDH 60H ITDH 30–2W	6W5H	ITDH 60H ITDH 30–2W
IRTM 6824 DH	6W2H	ITDHTR 16H ITDH 34–2W	6W2H	ITDHTR 16H ITDH 34–2W	6W2H	ITDHTR 16H ITDH 34–2W
IRTM 6868 DH	6W5H	ITDH 60H ITDH 34–2W	6W5H	ITDH 60H ITDH 34–2W	6W5H	ITDH 60H ITDH 34–2W
IRTM 7225 DH/DR	6W2H	ITDHTR 16H ITDH 36–2W	6W2H	ITDHTR 16H ITDH 36–2W	6W2H	ITDHTR 16H ITDH 36–2W
IRTM 7233 DH/DR	6W3H	ITDH 36–2W	6W3H	ITDH 36–2W	6W3H	ITDH 36–2W
IRTM 7269 DH/DR	6W5H	ITDH 36–2W	6W5H	ITDH 36–2W	6W5H	ITDH 36–2W
IRTM 7626 DH	8W2H	ITDHTR 16H ITDH 38–2W	8W2H	ITDHTR 16H ITDH 38–2W	8W2H	ITDHTR 16H ITDH 38–2W
IRTM 7670 DH	8W5H	ITDH 60H ITDH 38–2W	8W5H	ITDH 60H ITDH 38–2W	8W5H	ITDH 60H ITDH 38–2W
IRTM 8429 DH	8W2H	ITDHTR 16H ITDH 42–2W	8W2H	ITDHTR 16H ITDH 42–2W	8W2H	ITDHTR 16H ITDH 42–2W
IRTM 8473 DH	8W5H	ITDH 60H ITDH 42–2W	8W5H	ITDH 60H ITDH 42–2W	8W5H	ITDH 60H ITDH 42–2W

CN	Wood Grille	Unit Alignment	GBG	Unit Line Up	SDL	Unit Alignment
Full Ellipse and Circle – Rectangular Cut						
ICIRM 3636 DH	2W2H	N/A	2W2H	N/A	2W2H	N/A
IELIPM 3248 DH	2W2H	N/A	2W2H	N/A	2W2H	N/A

Notes:

- Direct Glaze Round Tops with Wood Grilles, GBGs, or SDL will only align with the lite cut of the unit it is intended to be mulled with.

ROUND TOP by MARVIN

SECTION DETAILS Scale 3″ = 1′ 0″

CASEMENT – 4 9/16”

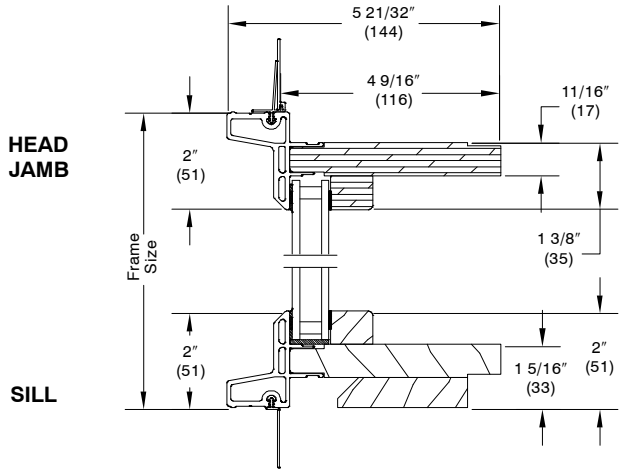

CASEMENT – 6 9/16”

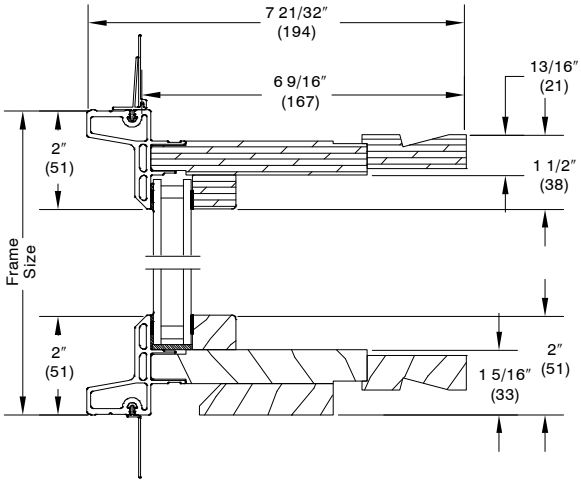

JAMB

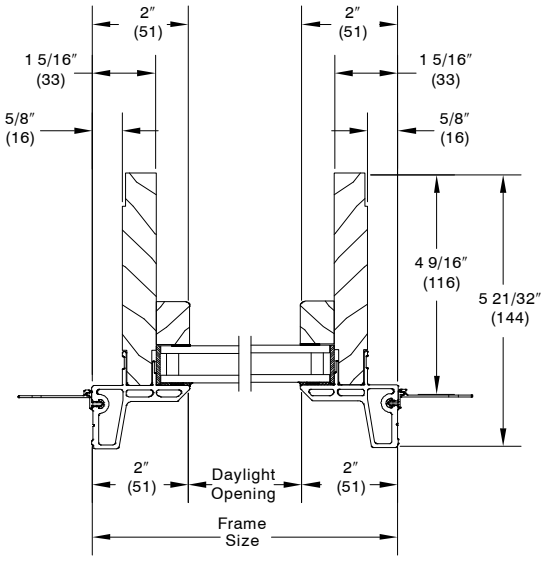

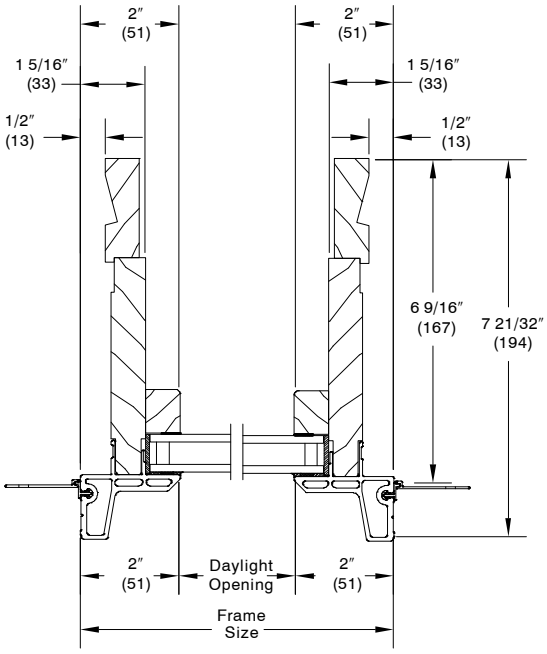

ROUND TOP by MARVIN

SECTION DETAILS Scale 3″ = 1′ 0″

DOUBLE HUNG/ DOOR – 4 9/16”

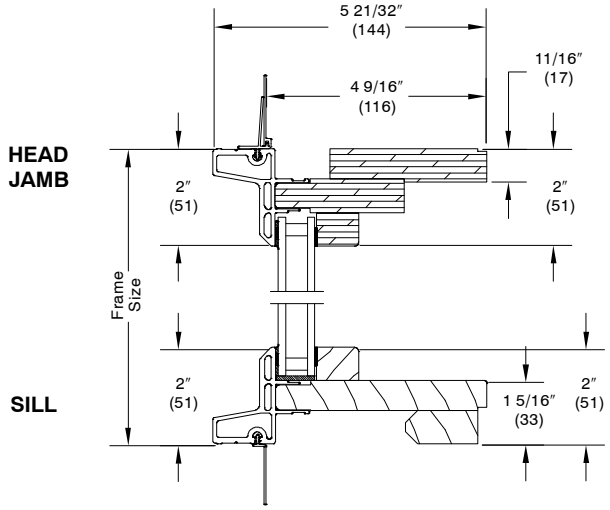

DOUBLE HUNG/ DOOR – 6 9/16”

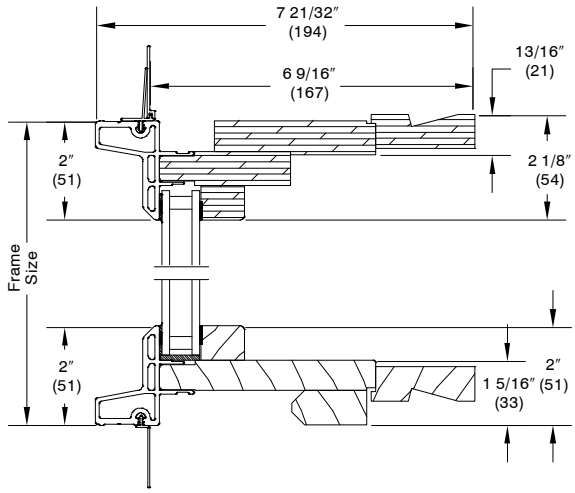

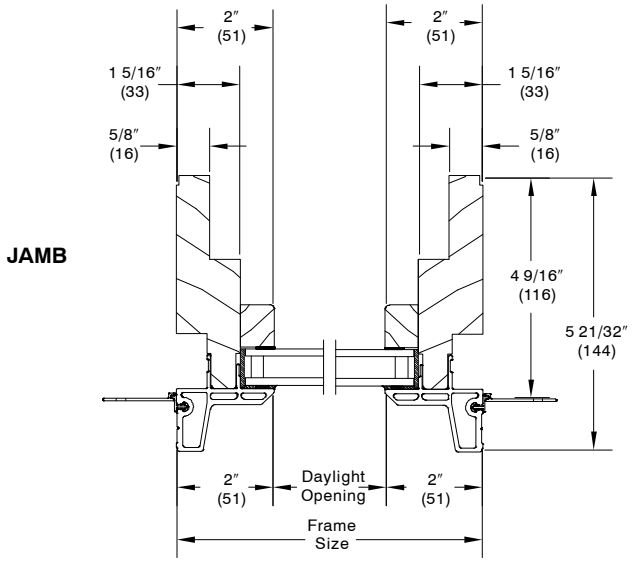

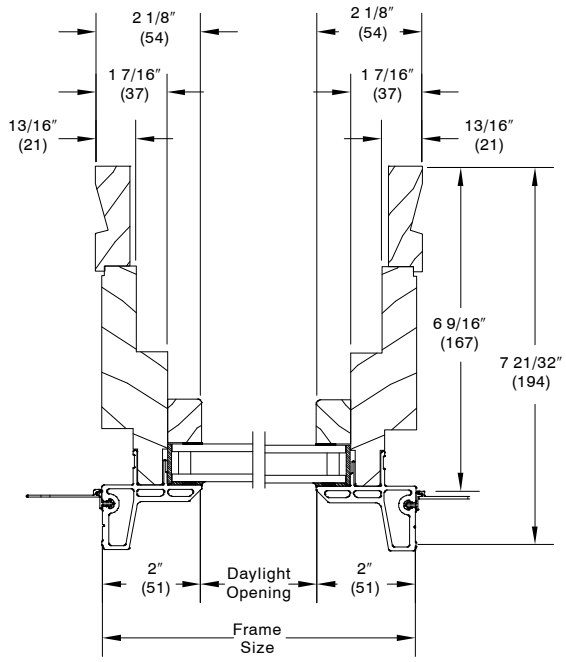

ROUND TOP by MARVIN

MULLION SECTION DETAILS Scale 3″ = 1′ 0″

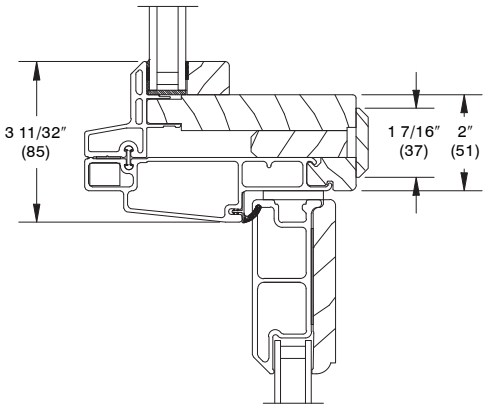

ROUND TOP
OVER SWINGING DOOR

NOTE:
Contact your Integrity representative for factory mulling options.

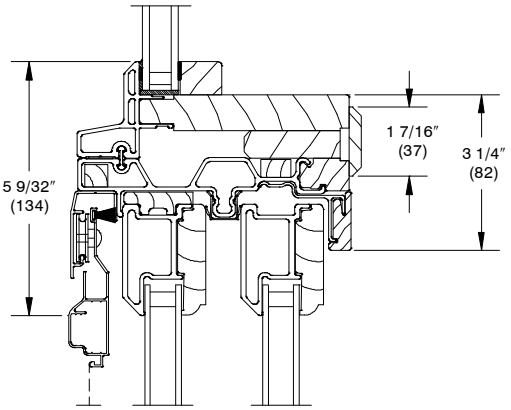

ROUND TOP
OVER PATIO DOOR

NOTE:
Contact your Integrity representative for factory mulling options.

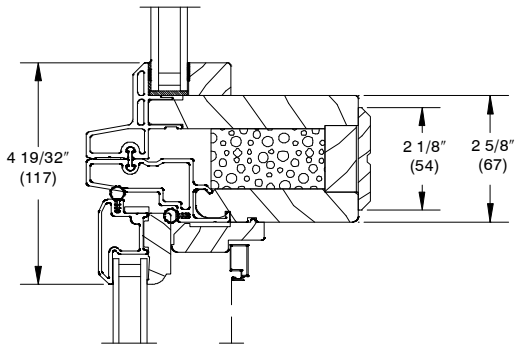

ROUND TOP
OVER OPERATING CASEMENT

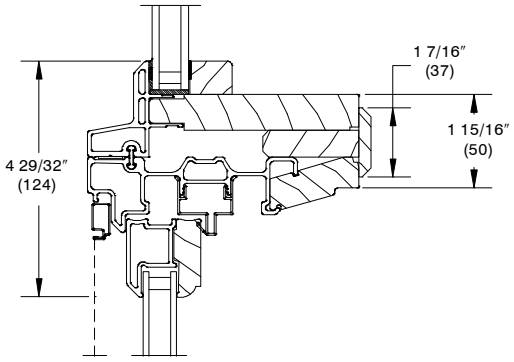

ROUND TOP
OVER TRADITIONAL DOUBLE HUNG

ROUND TOP by MARVIN

INSTALLATION SUGGESTION Scale 3″ = 1′ 0″

CASEMENT ROUND TOP

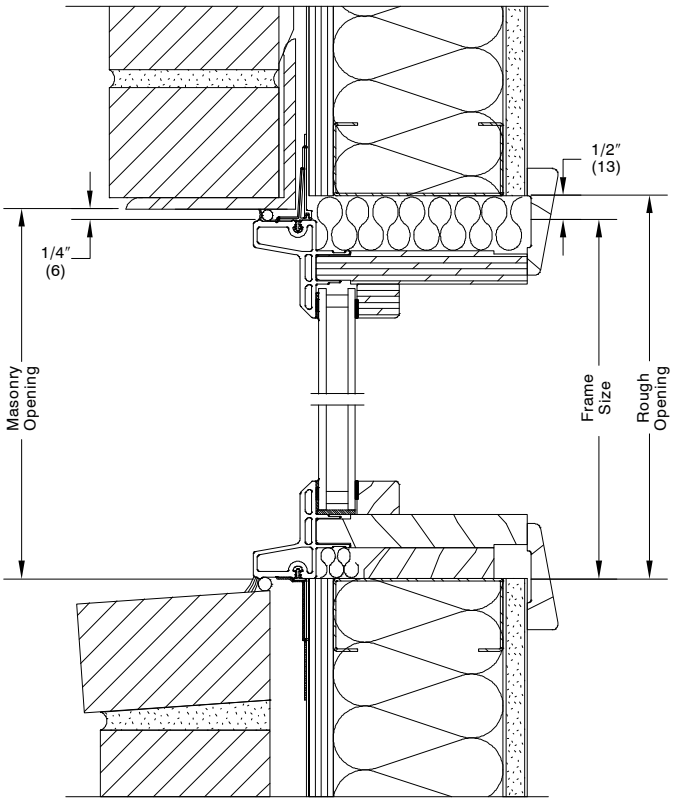

DOUBLE HUNG ROUND TOP

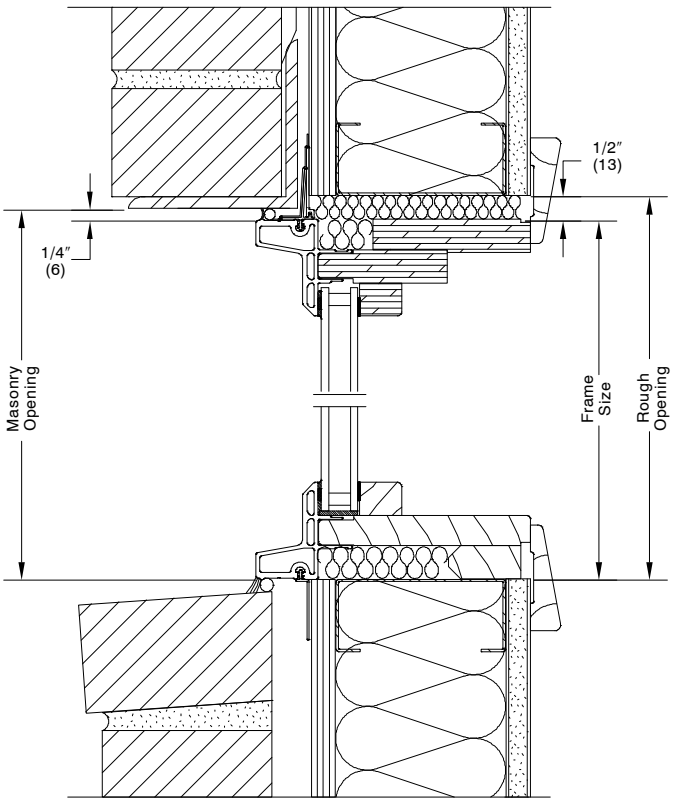

BRICK VENEER WITH STEEL FRAME CONSTRUCTION

NOTE:
The above wall sections represent typical wall conditions, these details are not intended as installation instructions. Please refer to the installation instructions provided with the purchased units.

ROUND TOP by MARVIN

INSTALLATION SUGGESTION Scale 3″ = 1′ 0″

CASEMENT ROUND TOP

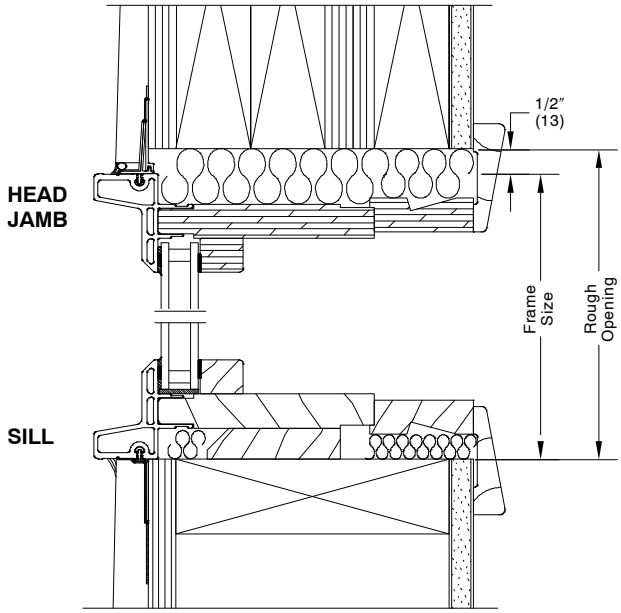

DOUBLE HUNG ROUND TOP

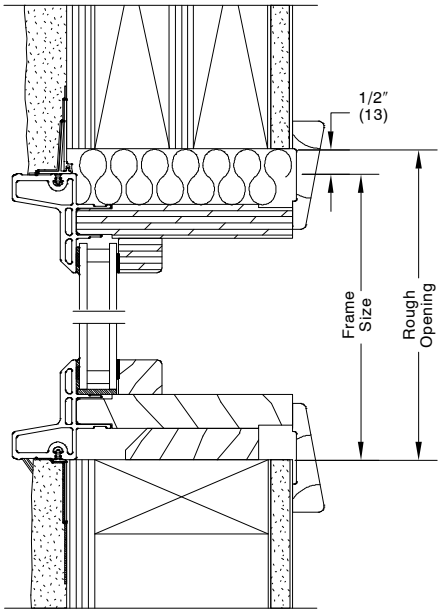

WOOD SIDING WITH 2X6 FRAME CONSTRUCTION

NOTE: Round Top unit shown with jamb extension

CASEMENT ROUND TOP

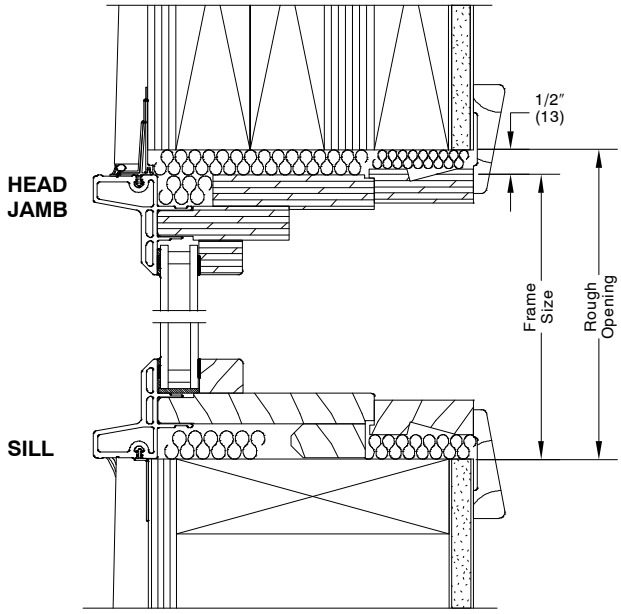

DOUBLE HUNG ROUND TOP

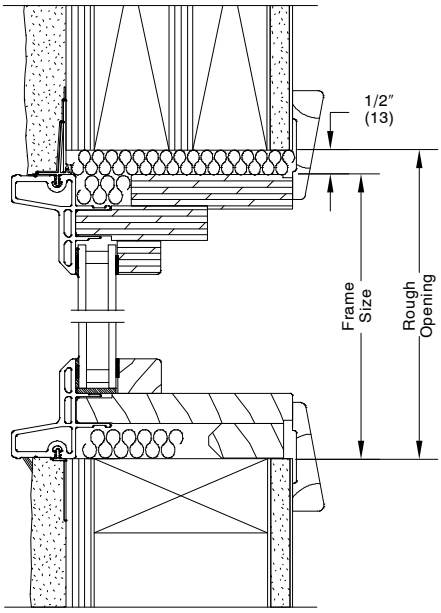

STUCCO WITH 2X4 FRAME CONSTRUCTION

NOTE:
The above wall sections represent typical wall conditions, these details are not intended as installation instructions. Please refer to the installation instructions provided with the purchased units.