

# OUTSWING FRENCH DOOR

INTEGRITY® FROM MARVIN®  
WOOD-ULTREX® SERIES


## Outswing French Doors

<b>Mas. Opg. (mm)</b>	2-6 13/16 (783)	2-8 13/16 (834)	3-0 13/16 (935)
<b>Rgh. Opg. (mm)</b>	2-7 5/16 (796)	2-9 5/16 (846)	3-1 5/16 (948)
<b>Frame Size (mm)</b>	2-6 5/16 (770)	2-8 5/16 (821)	3-0 5/16 (923)
<b>Glass Size (mm)</b>	22 19/32" (574)	24 19/32" (625)	28 19/32" (726)

6-7 3/4 (2026)									
IOFD2665 O	IOFD2665 XR	IOFD2665 XL	IOFD2865 O	IOFD2865 XR	IOFD2865 XL	IOFD3065 O	IOFD3065 XR	IOFD3065 XL	
6-8 (2032)									
IOFD2668 O	IOFD2668 XR	IOFD2668 XL	IOFD2868 O	IOFD2868 XR	IOFD2868 XL	IOFD3068 O	IOFD3068 XR	IOFD3068 XL	
6-7 1/2 (2019)									
IOFD2680 O	IOFD2680 XR	IOFD2680 XL	IOFD2880 O	IOFD2880 XR	IOFD2880 XL	IOFD3080 O	IOFD3080 XR	IOFD3080 XL	
68 9/32 (1734)									
6-10 1/4 (2089)									
6-10 1/2 (2096)									
6-10 (2083)									
70 25/32 (1798)									
7-11 3/4 (2432)									
8-0 (2438)									
7-11 1/2 (2426)									
84 9/32 (2141)									

## Outswing Door Operation

X signifies an operating door panel, O means stationary.  
Listing the panels in a door starts from the left to the right, looking from the exterior.

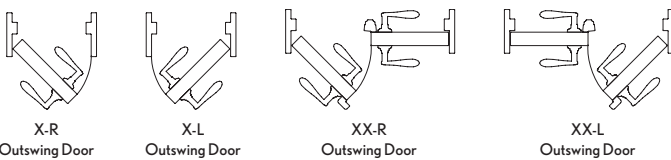

Details and Elevations not to scale.

O = Stationary      X = Operator  
L = Left Hand Panel      R = Right Hand Panel

Optional Outswing French Door Grilles, GBGs, SDLs and SDLs with Spacer Bar are available in a standard Rectangular cut, as shown.

Transom units have a 2" jamb extension for 6 9/16" jambs or a 2 1/4" jamb extension for 6 13/16" jambs. When ordering 6 9/16" or 6 13/16" jambs, add 1/4" to width and 1/8" to height of Frame Size (FS), Rough Opening (RO), or Masonry Opening (MO).

Optional Direct Glaze transom Grilles, GBGs, SDLs and SDLs with Spacer Bar are available in a standard Rectangular cut, as shown. Alternate transom lite cuts available to align with select lite cut options.

## Outswing French Door Direct Glaze Transoms









<b>Mas. Opg. (mm)</b>	3-0 13/16 (935)	5-11 1/2 (1816)	8-11 13/16 (2738)
<b>Rgh. Opg. (mm)</b>	3-1 5/16 (948)	6-0 (1829)	9-0 5/16 (2751)
<b>Frame Size (mm)</b>	3-0 5/16 (923)	5-11 (1803)	8-11 5/16 (2726)
<b>Glass Size (mm)</b>	33 1/2" (851)	68 3/16" (1732)	104 1/2" (2654)

1-4 (406)			
1-4 1/4 (413)			
1-3 3/4 (400)			
12 15/16 (329)			

# OUTSWING FRENCH DOOR



## Outswing French Doors

Mas. Opg. (mm)	2-6 13/16 (783)	5-3 1/2 (1613)	5-11 1/2 (1816)
Rgh. Opg. (mm)	2-7 5/16 (796)	5-4 (1626)	6-0 (1829)
Frame Size (mm)	2-6 5/16 (770)	5-3 (1600)	5-11 (1803)
Glass Size (mm)	22 19/32" (574)	24 19/32" (625)	28 19/32" (726)






## Multiple Assemblies - 2 Panel


Mas. Opg. (mm)	5-1 1/8 (1553)	6-1 1/8 (1857)
Rgh. Opg. (mm)	5-1 5/8 (1565)	6-1 5/8 (1870)
Frame Size (mm)	5-0 5/8 (1540)	6-0 5/8 (1845)

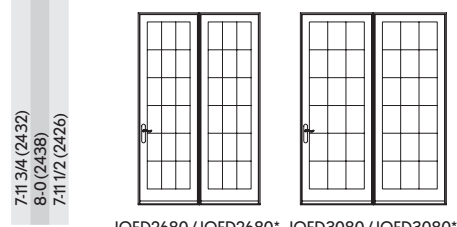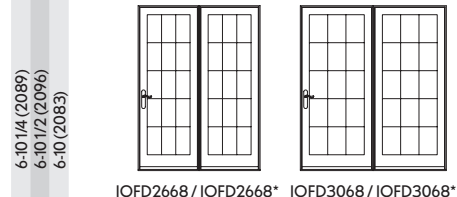

## Construction Details

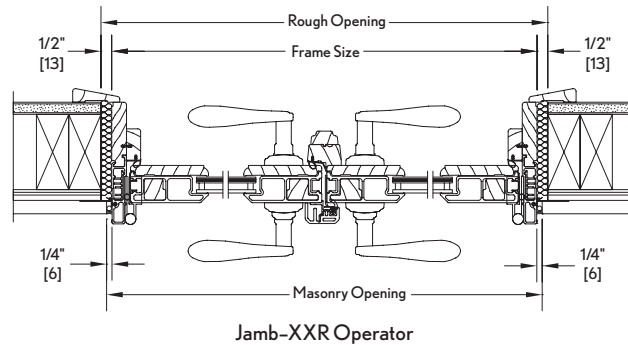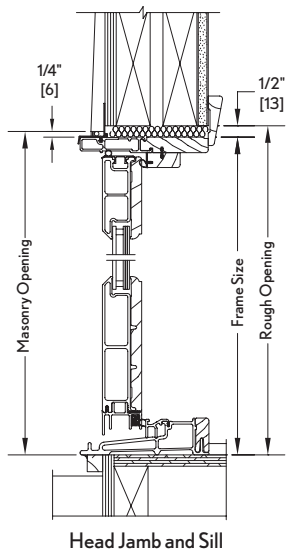

Direct Glaze  
Polygon/Transom  
Over Outswing  
French Door



Vertical Mullion  
XR-O

### MULTIPLE ASSEMBLIES

Multiple assembly units can be factory mullioned up to 3 units wide by 1 unit high, Maximum Rough Opening not to exceed 109 <sup>15</sup>/<sub>16</sub>" x 96"; or 2 units wide by 2 units high, maximum Rough Opening not to exceed 73 <sup>5</sup>/<sub>8</sub>" x 100 <sup>1</sup>/<sub>2</sub>". Field mull kits available for up to 3 units wide by 2 units high not to exceed 110" x 112". True Half Round transoms are available field mullioned only. Structural mullion reinforcement is required for some assemblies. Please consult your local Integrity from Marvin representative for more information.

# OUTSWING FRENCH DOOR


INTEGRITY® FROM MARVIN®  
WOOD-ULTREX® SERIES

## Multiple Assemblies - 3 Panel

<b>Mas. Opg. (mm)</b>	7-7 7/16 (2323)	7-7 7/16 (2323)	7-7 7/16 (2323)	7-5 13/16 (2281)
<b>Rgh. Opg. (mm)</b>	7-7 15/16 (2335)	7-7 15/16 (2335)	7-7 15/16 (2335)	7-6 5/16 (2294)
<b>Frame Size (mm)</b>	7-6 15/16 (2310)	7-6 15/16 (2310)	7-6 15/16 (2310)	7-5 5/16 (2269)



<b>Mas. Opg. (mm)</b>	9-1 7/16 (2780)	9-1 7/16 (2780)	9-1 7/16 (2780)	8-11 13/16 (2738)
<b>Rgh. Opg. (mm)</b>	9-1 15/16 (2792)	9-1 15/16 (2792)	9-1 15/16 (2792)	9-0 5/16 (2751)
<b>Frame Size (mm)</b>	9-0 15/16 (2767)	9-0 15/16 (2767)	9-0 15/16 (2767)	8-11 5/16 (2726)

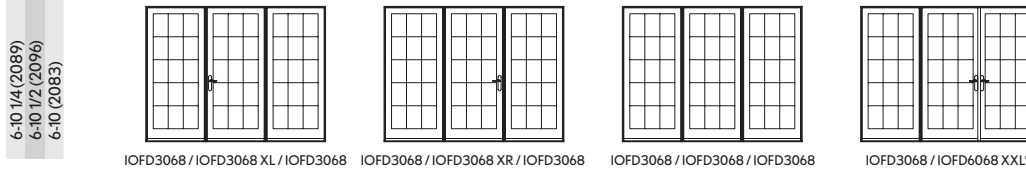


## Direct Glaze Transom Over Outswing French Door

<b>Mas. Opg. (mm)</b>	3-0 13/16 (935)	3-0 13/16 (935)	5-11 1/2 (1816)
<b>Rgh. Opg. (mm)</b>	3-1 5/16 (948)	3-1 5/16 (948)	6-0 (1829)
<b>Frame Size (mm)</b>	3-0 5/16 (923)	3-0 5/16 (923)	5-11 (1803)



## Round Top Over Outswing French Door

<b>Mas. Opg. (mm)</b>	5-11 1/2 (1816)
<b>Rgh. Opg. (mm)</b>	6-0 (1829)
<b>Frame Size (mm)</b>	5-11 (1803)



Details and Elevations not to scale.

O = Stationary      X = Operator  
L = Left Hand Panel      R = Right Hand Panel

\*2 panel mullered assembly

\*\*2 and 3 panel XX configurations also available in XX R.

\*\*\*This product is only available field mullered.

Optional Outswing French Door Grilles, GBGs, SDLs and SDLs with Spacer Bar are available in a standard Rectangular cut, as shown.

Transom units have a 2" jamb extension for 6 9/16" jambs or a 2 1/4" jamb extension for 6 13/16" jambs. When ordering 6 9/16" or 6 13/16" jambs, add 1/4" to width and 1/8" to height of Frame Size (FS), Rough Opening (RO), or Masonry Opening (MO).

Optional Direct Glaze transom Grilles, GBGs, SDLs and SDLs with Spacer Bar are available in a standard Rectangular cut, as shown. Alternate transom lite cuts available to align with select lite cut options.

Optional Round Top SDL/Grilles and SDL with Spacer Bar are available in a standard cut, as shown.